

DESCRIPTION

This class AB GaN module is designed for both military and commercial applications. It is capable of supporting any signal type and modulation format, including but not limited to 3-4G telecom, WLAN, OFDM, DVB, and CW/AM/FM. The latest device technologies and design methods are employed to offer high power density, efficiency, and linearity in a small, lightweight package.


FEATURES

High Speed On/Off Control
 Over-Temperature Protection

Temp. Monitor Output
 Auto Tx/Rx Switching (RF Detect)

Specifications subject to change without notice. Typical performance at VDC at 25°C in a 50Ω system

Tx SPECIFICATIONS				
PARAMETER	MIN	TYP.	MAX	UNIT
Operating Frequency	300		400	MHz
PSat Power Output		+40.0		dBm
Gain		25.0		dB
Gain Flatness		1.0		± dB
Input Return Loss	-12	-15		dB
Operating Voltage	+12		+30	VDC
Current Draw		1.4		A
Tx / Rx Switching Time		1.0	2.0	μs

Rx SPECIFICATIONS				
PARAMETER	MIN	TYP.	MAX	UNIT
P1dB Power Output		+15.0		dBm
Gain		11.0		dB
Gain Flatness		1.0		± dB
Noise Figure		2.0	3.0	dB
Input Return Loss	-10	-12		dB
Current Draw		200.0	0.0	mA

MECHANICAL		
PARAMETER	VALUE	UNIT
Dimensions (L x W x H)	3.25 x 2.42 x 0.54	in
RF Connectors (Input / Output)	SMA-F / SMA-F	--
DC / Control Connector	Rectangular Locking	--
Cooling	Baseplate Conduction - Optional Heatsink Available	--
Mounting	4-40 Through Holes	--
Weight	4	oz.
Weight With Heatsink	8	oz.


ENVIRONMENTAL / PROTECTIONS			
PARAMETER	MIN	MAX	UNIT
Operating Temperature (Housing Temp.)	-40	+85	°C
Humidity Range	0-95		%
Altitude	0-30,000		ft.
Shock / Vibration	MIL-STD-810 and equivalents		--
Max RF Input	8		dBm
PA Baseplate Shutoff Temperature	+85		°C

INPUT/OUTPUT PINS				
AMPLIFIER CONNECTOR TYPE:		8 PIN RECTANGULAR MALE		
TRIAD CABLE PART NUMBER:		CBL61		
PIN LABEL	NAME	DESCRIPTION	TYPE	LEVEL
1	TEMP	Analog Temperature Sensor Output	Power	--
2,4,6	GND	Ground	Power	--
5,7	+VDC	Supply Voltage - Range Specified in Datasheet	Power	--
8	SGND	Signal Ground	Input	5V TTL

802-11G (20 MHz BW) DATA RATE VS. OUTPUT POWER			
OFDM MODULATION	DATA RATE	POUT (W) MIN.	EVM
64QAM	54 Mbps	1	≤ -27 dB
16QAM	36 Mbps	2	≤ -21 dB
QPSK	12 Mbps	4	≤ -15 dB
BPSK	9 Mbps	8	≤ -7 dB

See our [application note](#) that describes how this table was calculated and provides notes on in-system performance

High-Level Block Diagram

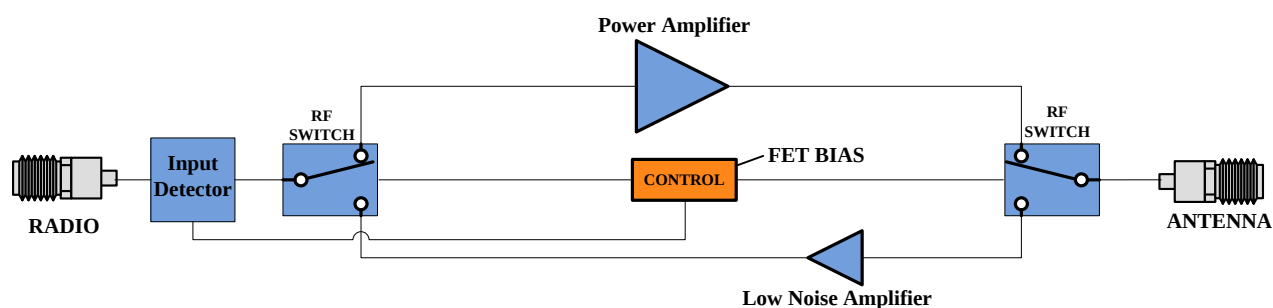


Ordering Guide – Configuration Information

Model Number	Amplifier Option	Heat Sink Option
TTRMXXXX - XXX - XXX		

Amplifier Options		Heat Sink Options	
Suffix	Description	Suffix	Description
D01	Automatic Tx/Rx Switching	(none)	No Heat Sink Included
D02	Manual Tx/Rx Switching	HS	Standard Heat Sink
DXX	Custom Amplifier Configuration (issued by Triad upon customer request)	HSF	Heat Sink with Integrated Cooling Fan
		HSX	Custom Heat Sink Configuration

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
0	INITIAL RELEASE	7/10/19	SC

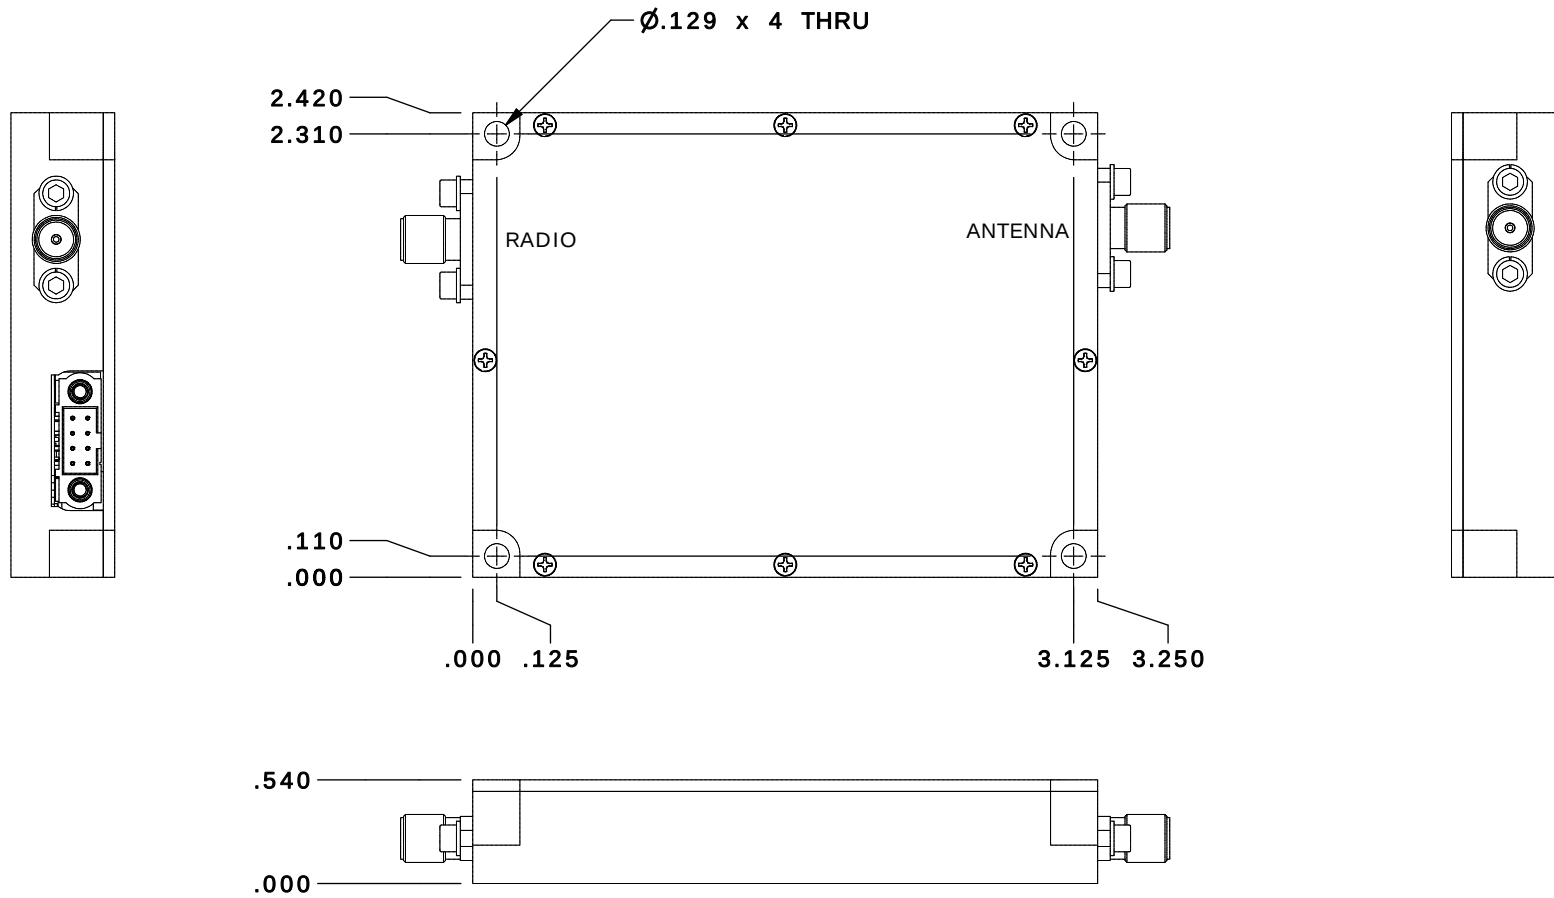

DRAWN	scopp	10/3/2013	 11 HARTS LANE SUITE I EAST BRUNSWICK, NJ 08816 855-558-1001				
DESIGNED	scopp	2/28/2018					
CHECKED	SC	7/10/2019					
ENG APPROVED			Housing Outline 191				
MFG APPROVED							
DIMENSIONS ARE IN INCHES UNLESS SPECIFIED OTHERWISE TOLERANCES DECIMALS FRACTIONS ANGLES .XX ±.01 ± 1/32 ± 2° .XXX ±.005			SIZE	DWG NO.	OL_191		REV
			A				0
						SCALE: NONE	CAGE CODE

A

B

C

D

E

OPTIONAL HEATSINK

1

1

2


2

3

3

4

4

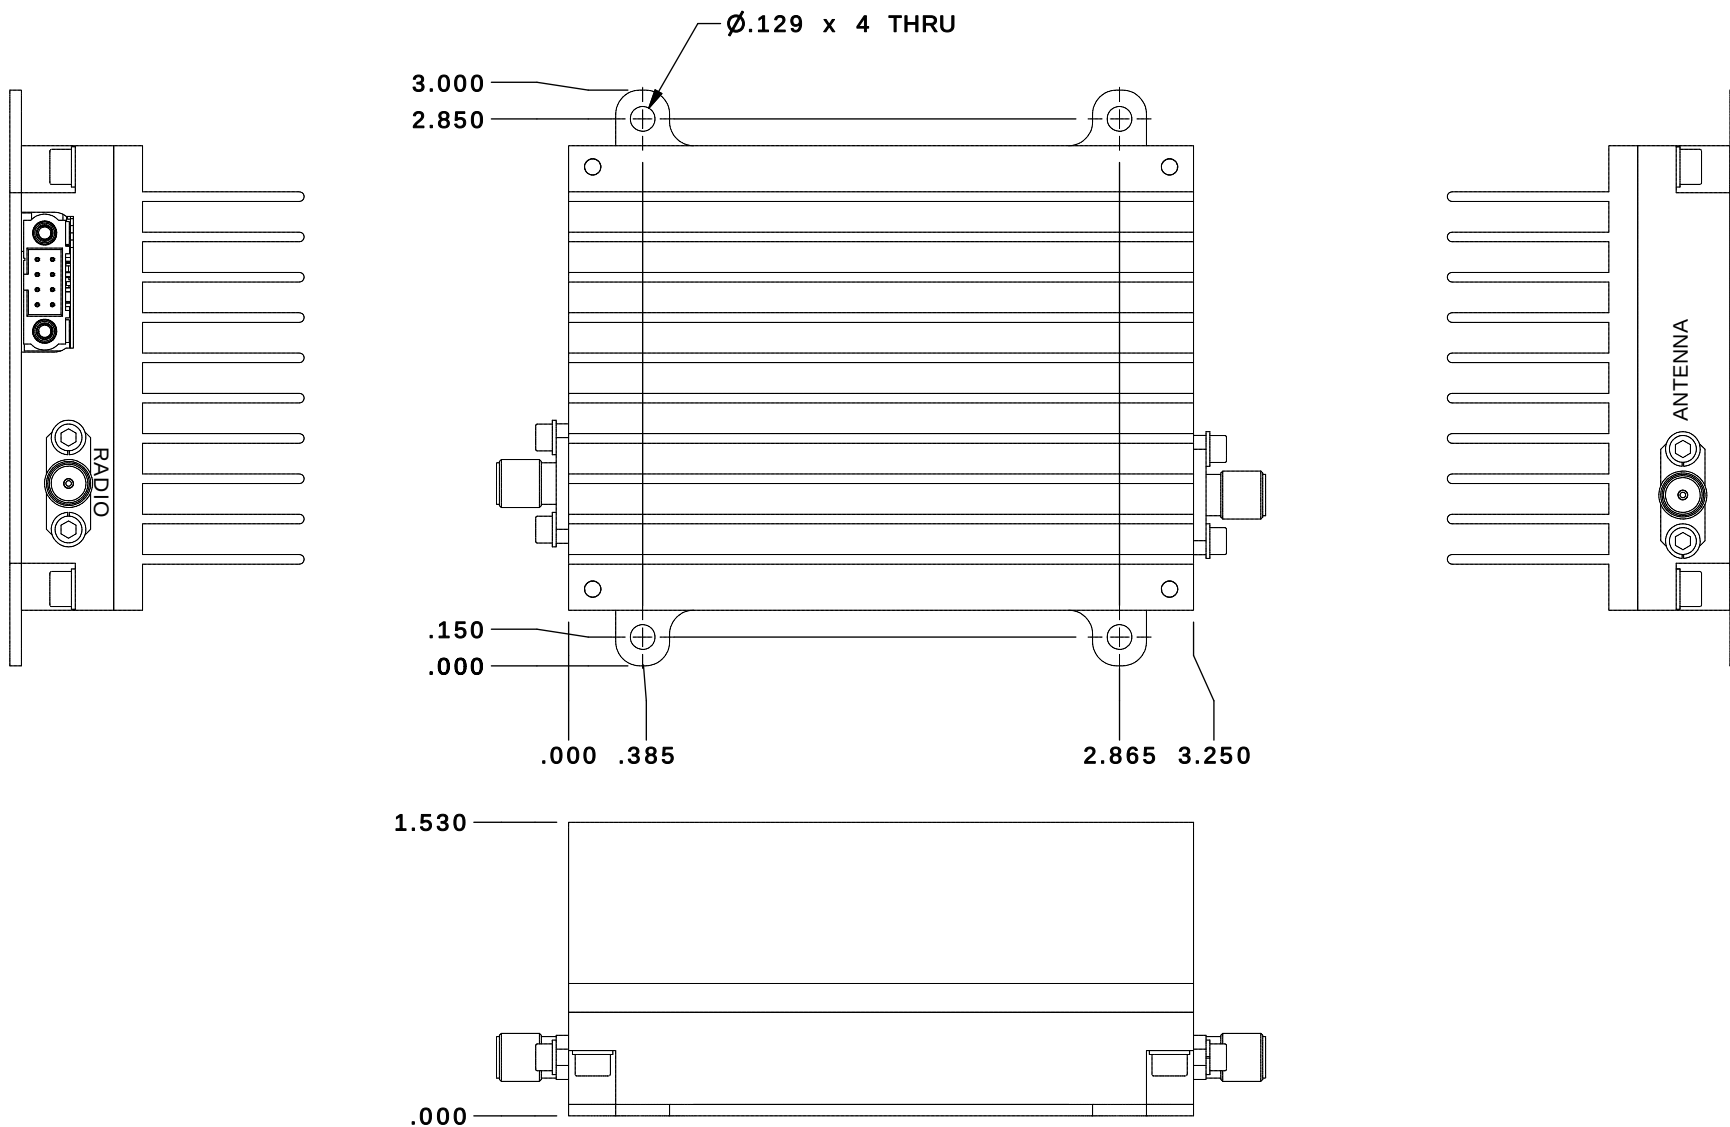

DRAWN	scopp	10/3/2013	Housing Outline 191			
DESIGNED	scopp	2/28/2018				
CHECKED	SC	7/10/2019	SIZE	DWG NO.		
ENG APPROVED			A	OL_191	REV	0
MFG APPROVED			SCALE: NONE	CAGE CODE 67DZ3	SHEET 2 OF 3	

A


B

C


D

E

OPTIONAL HEATSINK AND COOLING FAN

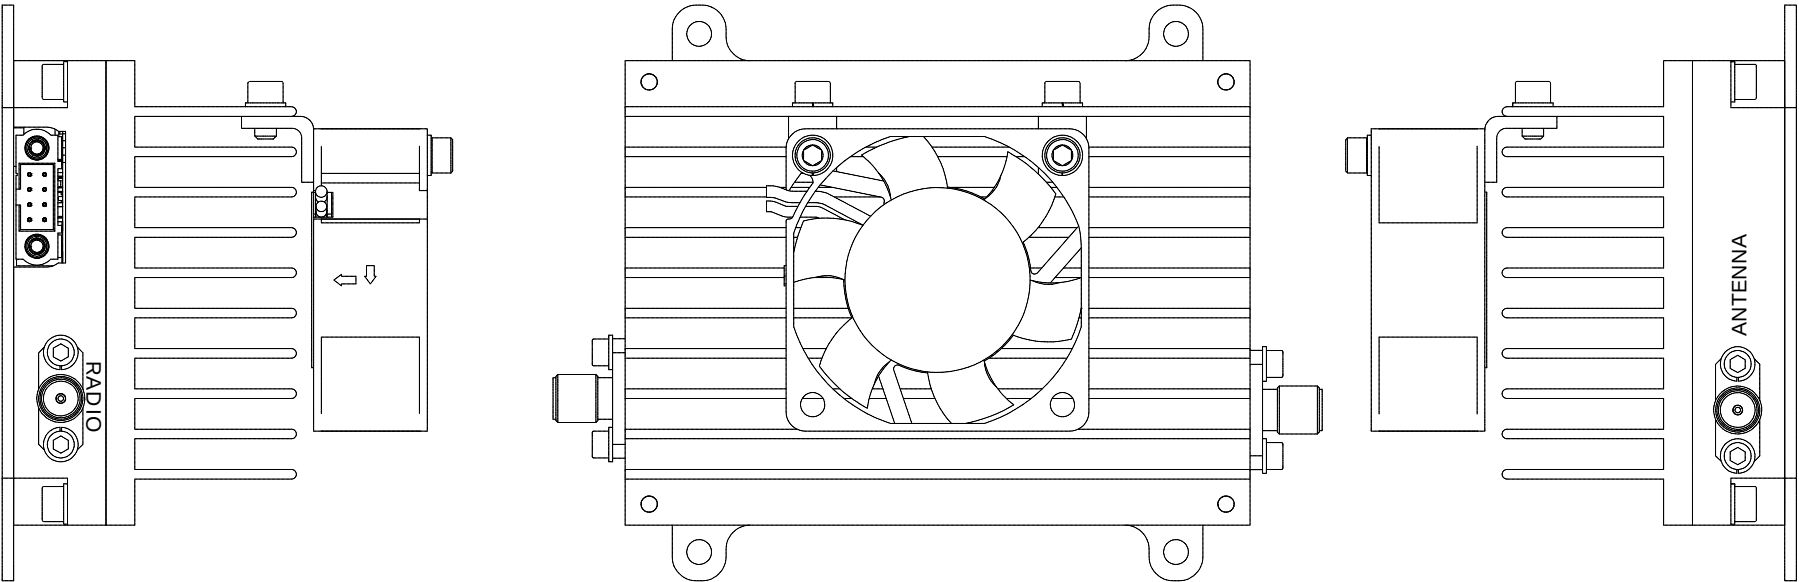

2.343

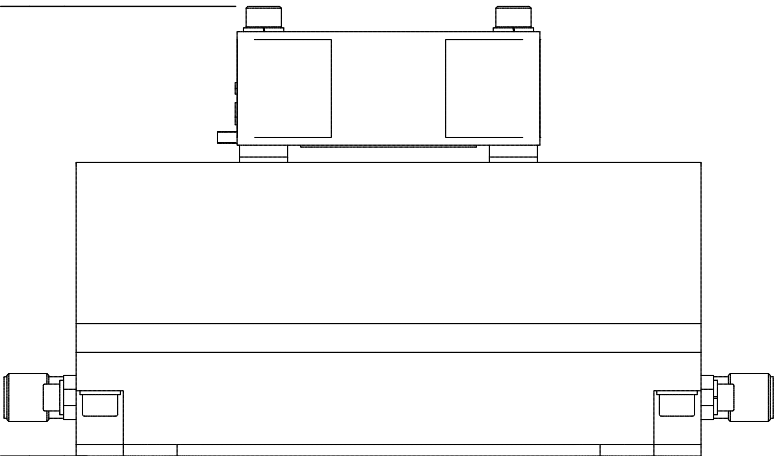

.000

DRAWN	scopp	10/3/2013	Housing Outline 191			
DESIGNED	scopp	2/28/2018				
CHECKED	SC	7/10/2019	SIZE	DWG NO.		
ENG APPROVED			A	OL_191	REV	
MFG APPROVED			SCALE: NONE		CAGE CODE 67DZ3	SHEET 3 OF 3